Keddy K800

Product features

Self-regulating damper (option).

The self-regulating damper sets a new safety standard for cast iron stoves. This feature optimises combustion and prevents overheating.

Flat-ground doors.

The stylish door is flat-ground on the inside. This ensures a safe and reliable seal when it closes – pure cast iron against cast iron. So there is no need to worry about seals wearing out over time.

100% cast iron.

K800 is a pure cast iron stove that effectively maintains its heat output and shape year after year.

Self-cleaning system.

Preheated combustion air circulates inside the combustion chamber and across the surface of the large front window. In combination with the double side glazing this provides better insulation and reduces the likelihood of soot forming on the glass.

Stove features.

POWER (kW)	**3-9 rated kW output**
EFFICIENCY (%)	**Approx. 80**

20-year guarantee.

The fully cast, durable construction means that we can give a 20-year guarantee on cast iron components.

K815 black.

K815 grey.

K816 grey.

K816 black.

Cast iron to suit your home.

The K800 series gives you the freedom to customise your cast iron stove so that it matches your home. For example, you can choose between cast iron in black or grey. Or you can change the material of the side panels to heat-storing soapstone or concrete. You can also choose between a variety of stove feet designs. This gives you a total of 20 different permutations to choose from. It's what we call cast iron to suit your home.

Soapstone top.

Soapstone surround.

Concrete top.

Concrete surround.

Accessories.

Hob.

Floor plate/floor glass.

Decor door.

Technical data.



DISTANCE TO COMBUSTIBLE WALL

(wall mounting)



(corner mounting)



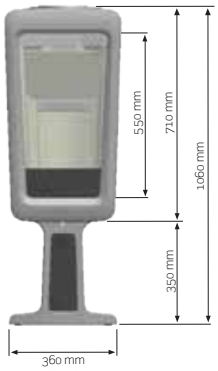

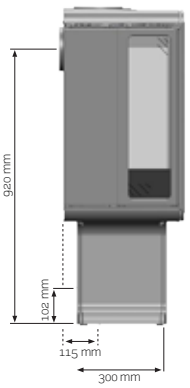

k815

WIDTH X HEIGHT X DEPTH	392,5 x 1060 x 400 mm	WEIGHT	Approx. 125-135 kg
FLOOR CONSTRUCTION	Timber joists	FLUE	Ø 150
HEIGHT TO CENTRE OF REAR OUTLET	920 mm (926 mm*)	POWER	3-9 rated kW output
EFFICIENCY	Approx. 80 %	FUEL	Wood
HEIGHT OF STOVE	710 mm	NORDIC ECOLABEL LIC. NO.	378016
HEIGHT OF STAND	350 mm		

* When mounted with floor glass.



DISTANCE TO COMBUSTIBLE WALL

(wall mounting)



(corner mounting)



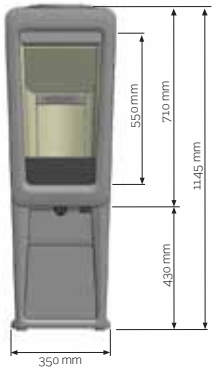

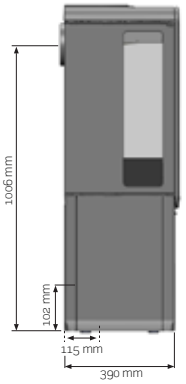

k816

WIDTH X HEIGHT X DEPTH	392,5 x 1145 x 400 mm	WEIGHT	Approx. 140-150 kg
FLOOR CONSTRUCTION	Timber joists	FLUE	Ø 150
HEIGHT TO CENTRE OF REAR OUTLET	1006 mm (1012 mm*)	POWER	3-9 rated kW output
EFFICIENCY	Approx. 80 %	FUEL	Wood
HEIGHT OF STOVE	710 mm	NORDIC ECOLABEL LIC. NO.	378016
HEIGHT OF STAND	430 mm		

* When mounted with floor glass.

KEDDY

Errors and omissions excepted. Specifications subject to change.