

New for
March 2013



From April 2013

The Newbourne 40FS (4.5kW) and 50FS (5.5kW) Multi Fuel Stoves

Recommended to Defra for Smoke Exemption Approval from April 2013

The **Newbourne 40FS** and **50FS** are brand new cleanburn multifuel stoves which are available in a nominal 4.5kW and 5.5kW output ratings. The Newbourne stoves offer a sleek and stylish design with a full width curved door that gives an impressively wide view of the fire burning brightly in the stove. A beautiful nickel plated cool-to-touch door handle with a positive locking mechanism fitted to the door ensures a delightful operation when loading fuel into the capacious firebox.

The **Newbourne** stoves are designed with primary air control, secondary air wash to keep the glass clean and tertiary air to ensure clean burn high efficiency performance when burning wood or smokeless fuel.

These stoves will make a beautiful and stylish addition to any room setting with their smooth and good looking symmetrical lines whilst offering a lovely warm and efficient cosy controllable heat.

Exclusively available through authorised stockists throughout the UK.



A World of Stoves, A World of Choice

Pevex Enterprises Ltd
email: sales@woodstoves.co.uk

Tel: 0044 01473 736399

Fax: 0044 01473 736406




Newbourne Stoves - Features



From April 2013

- ◆ CE and EN13240 approved and recommended to Defra for smoke exemption approval as from April 2013
- ◆ Clean modern and attractive British designed stove
- ◆ Heavy duty construction
- ◆ Multifuel use and available in two outputs (4.5kW and 5.5kW)
- ◆ Vermiculite lined fire chamber
- ◆ Heavy duty convector top plate
- ◆ Full height/width heavy duty curved door
- ◆ Top and rear flue outlet (5" dia)
- ◆ Ergonomic cool-to-touch nickel plated handle
- ◆ High efficiency clean burn firebox
- ◆ Fitted with 60mm adjustable legs
- ◆ Riddling grate available on the Newbourne 50

Technical Specification

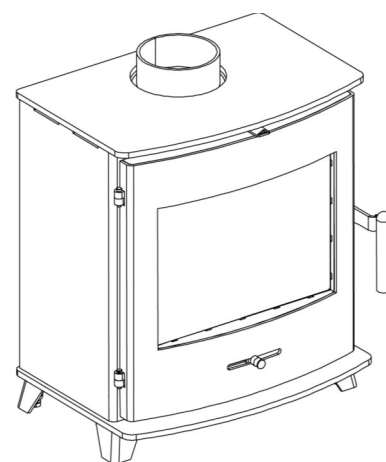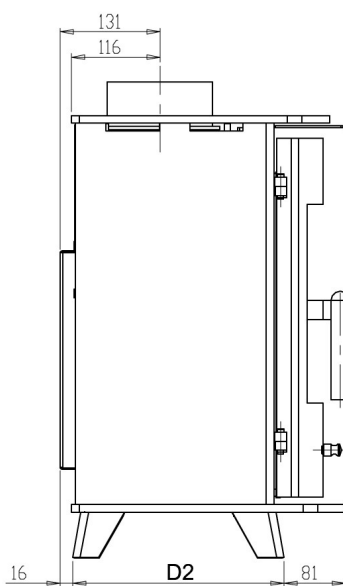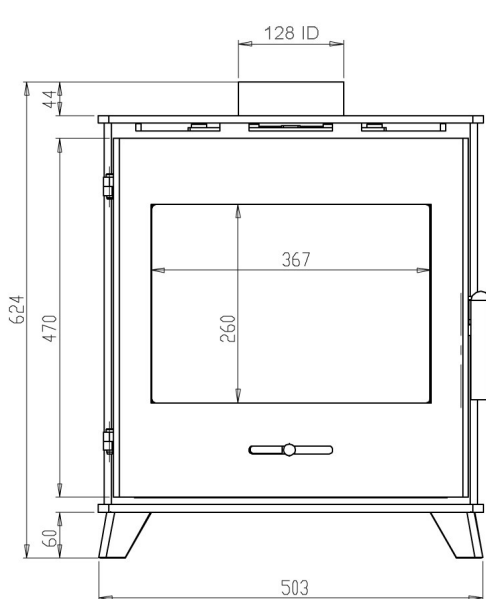

Newbourne 40FS

Newbourne 50FS

	Newbourne 40FS	Newbourne 50FS
Width x max depth x height (to top plate)	503 x 374 x 580	503 x 414 x 580
Distance between legs D2	277	317
Weight kg	85	95
Log length	380	380
Flue dia (top or rear)	128	
Nominal Output kW	4.5	5.5
Distance from rear of stove to centre of top flue outlet	131	
Distance from floor to centre of rear flue outlet	495	
Efficiency (Net): Wood %	79.5	75.5
Efficiency (Net): Smokeless fuel %	72.4	70.2
CO% @ 13% O2: Wood	0.14	0.15
CO% @ 13% O2: Smokeless fuel	0.33	0.33

All dims in mm